



U.S. Department
of Transportation

Pipeline and
Hazardous Materials
Safety Administration

COMPETENT AUTHORITY CERTIFICATION
FOR A TYPE B(U)
RADIOACTIVE MATERIALS PACKAGE DESIGN
CERTIFICATE USA/6306/B(U), REVISION 17

1200 New Jersey Ave. S.E.
Washington, D.C. 20590

REVALIDATION OF CANADIAN COMPETENT AUTHORITY CERTIFICATE CDN/2012/B(U)

This certifies that the radioactive materials package design described below is hereby approved for use within the United States for import and export shipments only. Shipments must be made in accordance with the applicable regulations of the International Atomic Energy Agency¹ and the United States of America².

1. Package Identification - F-168 Shipping Flask, Serial Nos. 20, 21, 28, 31, 32, 33, 36, 38, 39, 42 to 52 inclusive.
2. Packaging Description and Authorized Radioactive Contents - as described in Canadian Certificate of Competent Authority CDN/2012/B(U), Revision 23 (attached).
3. General Conditions -
 - a. Each user of this certificate must have in his possession a copy of this certificate and all documents necessary to properly prepare the package for transportation. The user shall prepare the package for shipment in accordance with the documentation and applicable regulations.
 - b. Each user of this certificate, other than the original petitioner, shall register his identity in writing to the Office of Hazardous Materials Technology (PHH-23), Pipeline and Hazardous Materials Safety Administration, U.S. Department of Transportation, Washington, D.C. 20590-0001.
 - c. This certificate does not relieve any consignor or carrier from compliance with any requirement of the Government of any country through or into which the package is to be transported.
4. Marking and Labeling - The package shall bear the marking USA/6306/B(U) in addition to other required markings and labeling.
5. Expiration Date - This certificate expires on March 31, 2016.


¹ "Regulations for the Safe Transport of Radioactive Material, 1996 Edition (Revised), No. TS-R-1 (ST-1, Revised)," published by the International Atomic Energy Agency (IAEA), Vienna, Austria.

² Title 49, Code of Federal Regulations, Parts 100-199, United States of America.

CERTIFICATE USA/6306/B(U), REVISION 17

This certificate is issued in accordance with paragraph 816 of the IAEA Regulations¹ and Section 173.473 of Title 49 of the Code of Federal Regulations², in response to the petition and information dated March 7, 2012 submitted by Nordion (Canada) Inc., Ottawa, Canada and in consideration of other information on file in this Office.

Certified by:



Dr. Magdy El-Sibaie

Associate Administrator for Hazardous Materials Safety

MAR 16 2012

(DATE)

Revision 16 - Issued to revalidate Canadian Certificate of Competent Authority No. CDN/2012/B(U), Revision 23, and to extend the expiration date.



Canadian Certificate No. CDN/2012/B(U) (Rev. 23)	Issue Date Feb-27-2012	Expiry Date Mar-31-2016	CNSC File 30-A2-94-0
--	----------------------------------	-----------------------------------	--------------------------------

Certificate for Transport Package Design

The transport package design identified below is certified by the Canadian Nuclear Safety Commission pursuant to paragraph 21(1)(h) of the *Nuclear Safety and Control Act* and Section 7 of the *Packaging and Transport of Nuclear Substances Regulations*, and to the 1973 Revised Edition (as amended) of the IAEA *Regulations for the Safe Transport of Radioactive Material*.

REGISTRATION OF USE OF PACKAGES

All users of this authorization shall register their identity in writing with the Canadian Nuclear Safety Commission prior to the first use of this authorization and shall certify that they possess the instructions necessary for preparation of the package for shipment.

PACKAGE IDENTIFICATION

Designer: **Nordion (Canada) Inc.**
Make/Model: **F-168 Shipping Flask, Serial Nos. 20, 21, 28, 31, 32, 33, 36, 38, 39, 42 to 52 inclusive.**
Mode of Transport: **Air, Sea, Road, Rail**

IDENTIFICATION MARK

The package shall bear the competent authority identification mark "**CDN/2012/B(U)**".

PACKAGE DESCRIPTION

The F-168 packaging, as shown on Nordion Drawing Nos. F116801-001, (Rev. T) and F116801-020, (Rev. H), consists of a lead filled (266 mm lead shielding) steel encased right cylinder with external fins, insulated steel flame shields on the top and side, steel covered insulation on the bottom and an optional heat screen on the top. The package is permanently mounted on a structural steel base. The containment system is the source assembly.

An illustration of the package is shown on attached Drawing No. F-168, (Rev. 32).

Any modification to the package design must be submitted to the Canadian Nuclear Safety Commission for approval prior to implementation.



Canadian Certificate No. CDN/2012/B(U) (Rev. 23)	Issue Date Feb-27-2012	Expiry Date Mar-31-2016	CNSC File 30-A2-94-0
--	----------------------------------	-----------------------------------	--------------------------------

The configuration of the package is as follows:

Shape: Cylinder	Shielding: Lead
Mass: 5445 kg	Outer Casing: Steel
Length: 1372 mm	Height: 1659 mm
Width: 1372 mm	Diameter: 1013 mm

AUTHORIZED RADIOACTIVE CONTENTS

See Appendix A

QUALITY ASSURANCE

Quality assurance for the use, maintenance and inspection of the package shall be in accordance with:

- Nordion document entitled "MDS Nordion No. IN/QA 0224 Z000 (7)*, Radioactive Material Transport Package Quality Plan"
- Nordion document entitled "MDS Nordion No. IN/OP 0019 Z000 (14)*, Radioactive Material Transport Packaging Inspection and Maintenance Procedure"
- Packaging and Transport of Nuclear Substances Regulations
- IAEA Regulations
- * or latest current revision

SHIPMENT

The preparation for shipment of the package shall be in accordance with:

- Nordion document entitled "MDS Nordion No. IN/PP 0517 F168 (14), Preparation for Shipment of the F-168 and F-168-X Transport Packagings"
- Packaging and Transport of Nuclear Substances Regulations
- IAEA Regulations

The average surface heat flux of the package with 7400 TBq of Cobalt 60 is 493 W/m^2 . For heat fluxes exceeding 15 W/m^2 , supplementary arrangements must be made with the carrier to ensure adequate heat dissipation.



Canadian Certificate No. CDN/2012/B(U) (Rev. 23)	Issue Date Feb-27-2012	Expiry Date Mar-31-2016	CNSC File 30-A2-94-0
--	----------------------------------	-----------------------------------	--------------------------------

Air transport is restricted to a maximum of 1200 TBq of Cobalt 60 to meet the 3000 A2 value and the temperature requirement of Paragraphs 416 and 617 of the IAEA Regulations.



This certificate does not relieve the consignor from compliance with any requirement of the government of any country through or into which the package will be transported.

S. Faillie
Designated Officer pursuant to paragraph 37(2)(a)
of the Nuclear Safety and Control Act



Parts List

1. Upper Fireshield
2. Heat Screen
3. Retaining Brackets (4) for Upper Fireshield
4. Radiation Caution Plate (2)
5. MDS Nordion Identification Plate (2)
6. Fireshield (Removable) Laminated Construction:
2 x 6.3 mm (0.25 in.) Steel + 25.4 mm (1 in.) Kaowool
O.D. 1,013 mm (39.88 in.)
7. Warning Plate "CAUTION - HEAT EMITTER - DO NOT STORE
IN INSULATED OR REFRIGERATION CONTAINER OR
INSULATED SPACE" (2)
8. Transite - Steel Encased
9. Vermiculite Packing
10. Gasket (Neoprene)
11. 7/8 - 9 x 2 in. long Hex Bolt (8)
12. Wire Seal
13. 3/8 in. NPT Pipe Plug (2)
14. Plug Lift Lug
15. Vent Tube
16. Plug
17. Cavity: 479 mm x 162 mm Dia. (18.87 in. x 6.37 in. Dia.)
18. Radioactive Contents and Carrier
19. Drain Tube
20. 3/4 - 10 x 2 in. Hex Bolt for Skid (4)
21. Removable Shipping Skid, 1,370 mm (54 in.) square
22. Nipple and Drainline Cap
23. Shield Plate with 3/8 - 16 Screws (3)
24. Category Label (2): on two opposite sides
25. Eye Bolt
26. Eye Bolt Cover
27. UN Number Label (2): one next to each radioactive category label

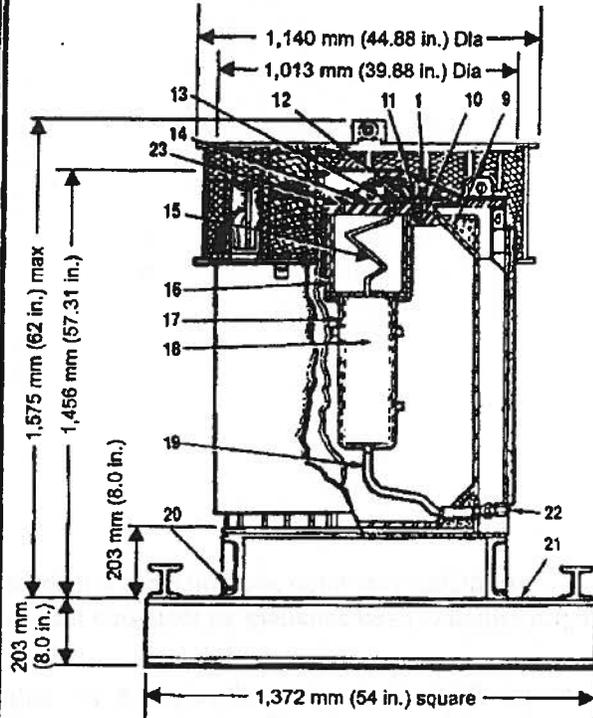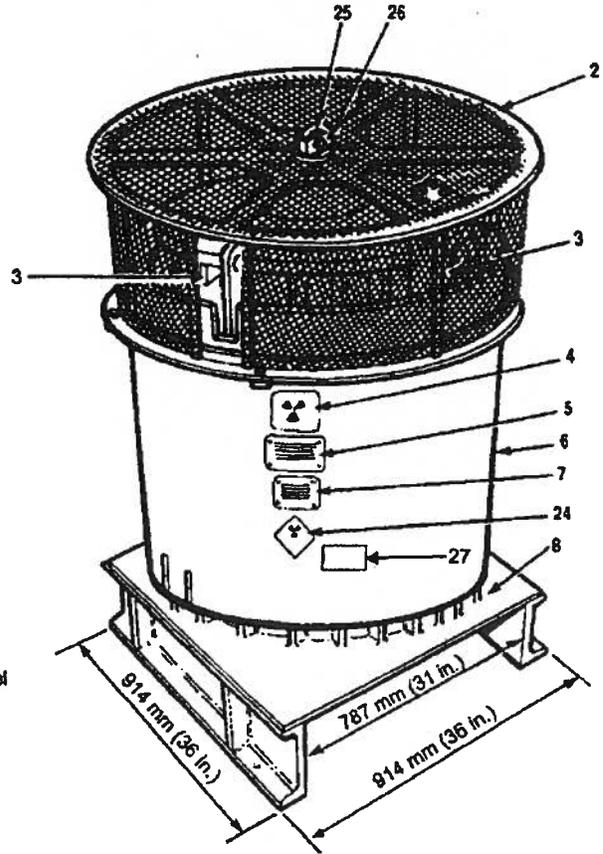

Notes

1. CNSC Certificate CDN/2012/B(U)
2. Meets IAEA Type B(U) Requirements
3. Steel encased lead shielding: 266 mm (10.5 in.)
4. Gross Weight: 5,445 kg (12,000 lb.)
5. Plug Weight: 177 kg (390 lb.)
6. Projected Floor Loading: 2,900 kg/m² (593 lb./ft.²)
7. Radionuclides carried:
 1. Cobalt-60
 2. Antimony-124
 3. Cesium-137
8. Labels may be positioned as illustrated, or 45° to that shown
9. Heat screen used only for air and non-exclusive use shipments

MDS Nordion

447 March Road, P.O. Box 13500
 Kenata, Ontario, Canada, K2K 1X8
 Tel: (613) 592-2790 · Fax: (613) 592-6937

TITLE

F-168 Transport Package

REF.	IN/SS 1182 F168 F116801-001/F116801-020	REVISED June 03	DCN A1944-D-108
DATE	November 1965	No.	F-168
ISSUE			32
DRAMA	CHECKED	APPROVED	
SW	AD	ML	
SHEET 1 OF 1			

THIS DRAWING IS THE PROPERTY OF MDS NORDION AND IS SUBMITTED FOR CONSIDERATION ON THE UNDERSTANDING THAT THERE SHALL BE NO EXPLOITATION OF ANY INFORMATION CONTAINED HEREIN EXCEPT WITH THE SPECIFIC WRITTEN AGREEMENT OF MDS NORDION.

Appendix A

Radionuclide	Max. Quantity TBq (curies)	Form	Max. Decay Heat (watts)	Encapsulation
Cobalt-60	7,400 (200,000)	metal pellets, metal wafers, metal slugs, stainless steel clad wire, aluminum clad cobalt slugs	3,200	C132, C133, C146, C151, C177, C185, C188, C189, C190, C198, C199, C200, C238, TC239, C246, C247, C248, C252, C306, C335, XC318, XC325
Cobalt-60	2,590 (70,000)	metal slug aluminum sheathed	1,070	C-350 in F359 carrier
Cobalt-60	5,550 (150,000)	metal slug nickel plated	2,320	C351 in F179 carrier with central position empty
Antimony-124	1,850 (50,000)	cast metal	660	C232
Cesium-137	3,700 (100,000)	cesium chloride	522	Special Form with double encapsulation in stainless steel

Combination loading of the above materials is authorized provided that the sum of the ratios of loaded activity to authorized activity, for all material loaded, does not exceed one.



U.S. Department
of Transportation

East Building, PHH-23
1200 New Jersey Avenue SE
Washington, D.C. 20590

**Pipeline and
Hazardous Materials
Safety Administration**

CERTIFICATE NUMBER: USA/6306/B(U)-85, Revision 17

ORIGINAL REGISTRANT(S):

Luc Desgagne
Senior Licensing Coordinator
Nordion (Canada) Inc.
447 March Road
Ottawa, K2K 1X8
Canada

Jackie Kavanagh
Manager, Facility & Transportation Licensing
Nordion (Canada) Inc.
447 March Road
Ottawa, K2K 1X8
Canada

REGISTERED USER(S):

Dr. Richard Wassenaar, PhD
Radiation Safety Officer
Best Theratronics Ltd.
Best Theratronics Ltd.
413 March Road
Ottawa, K2K 0E4
Canada

Gwen McCaffrey
QA Coordinator
Best Theratronics Ltd.
Best Theratronics
413 March Road
Ottawa, K2K 0E4
Canada

Mr. C. Joseph Harless
Director, Radiation Safety
Sterigenics
10811 Withers Cove Park Drive
Charlotte, 28278
USA