



U.S. Department
of Transportation

400 Seventh Street, S.W.
Washington, D.C. 20590

**Pipeline and
Hazardous Materials
Safety Administration**

**COMPETENT AUTHORITY CERTIFICATION
FOR A RADIOACTIVE MATERIALS PACKAGE DESIGN
CERTIFICATE USA/0411/H(U)-96, REVISION 1**

This certifies that the radioactive materials package design described below has been certified by the Competent Authority of the United States as meeting the regulatory requirements for a packaging for non-fissile or fissile excepted uranium hexafluoride as prescribed in the regulations of the International Atomic Energy Agency¹ and United States of America² regulations.

1. Package Identification - Cylinder Model Nos. 5A, 5B, 8A, 12A, 12B, 30A, 30B, 48A, 48F, 48G, 48H, and 48HX.
2. Packaging Description - The packaging authorized by this certificate are bare metal cylinders (no protective overpacks required) which are designed, fabricated, inspected and marked in accordance with American National Standards Institute (ANSI) N14.1 standard in effect at the time of manufacture. Cylinders must be periodically inspected, tested, marked, repaired, and modified in accordance with the ANSI N14.1 standard in effect at the time of the action.
3. Authorized Radioactive Contents - The cylinders authorized by this certificate must contain non-fissile or fissile excepted quantities of residual (heels) uranium hexafluoride in quantities equal to or less than described and limited by Table 1.

TABLE 1 - Allowable Content Of Uranium Hexafluoride (UF₆) "Heels" In An ANSI N14.1 Cylinder

Maximum cylinder diameter		Cylinder Volume		Maximum "heel" weight per cylinder			
Inches	Centi-meters	Cubic Feet	Liters	UF6		Uranium-235	
				kg	Lb	kg	Lb
5	12.7	0.311	8.8	0.045	0.1	0.015	0.03
8	20.3	1.359	39	0.227	0.5	0.015	0.03
12	30.5	2.410	68	0.454	1.0	0.015	0.03
30	76.0	25.64	725	11.3	25	0.015	0.03
48	122.0	108.9 (10 ton)	3084	22.7	50	0.015	0.03
48	122.0	142.7 (14 ton)	4041	22.7	50	0.015	0.03

¹ "TS-R-1 (ST-1, Revised), Regulations for the Safe Transport of Radioactive Material, 1996 Edition (Revised)," published by the International Atomic Energy Agency (IAEA), Vienna, Austria.

² Title 49, Code of Federal Regulations, Parts 100 - 199, United States of America.

CERTIFICATE USA/0411/H(U), REVISION 1

4. General Conditions


- a. Each user of this certificate must have in his possession a copy of this certificate and all documents necessary to properly prepare the package for transportation in accordance with the endorsed certificate.
- b. Each user of this certificate, other than the original petitioner, shall register his identity in writing to the Office of Hazardous Materials Technology (PHH-23), Pipeline and Hazardous Materials Safety Administration, U.S. Department of Transportation, Washington D.C. 20590.
- c. This certificate does not relieve any consignor or carrier from compliance with any requirement of the Government of any country through or into which the package is to be transported.
- d. Records of Quality Assurance activities required by Paragraph 310 of the IAEA regulations¹ shall be maintained and made available to the authorized officials for at least three years after the last shipment authorized by this certificate. Consignors and consignees in the United States exporting or importing shipments under this certificate shall satisfy the requirements of Subpart H of 10 CFR 71.

4. Marking and Labeling - The package shall bear the marking USA/0411/H(U)-96 in addition to other required markings and labeling.

5. Expiration Date - This certificate expires on September 1, 2011.

This certificate is issued in accordance with paragraph 805 of the IAEA Regulations and Section 173.420 of Title 49 of the Code of Federal Regulations, in response to a April 26, 2006 petition submitted by United States Enrichment Corporation, Paducah, KY, and in consideration of other information on file in this Office.

Certified by:

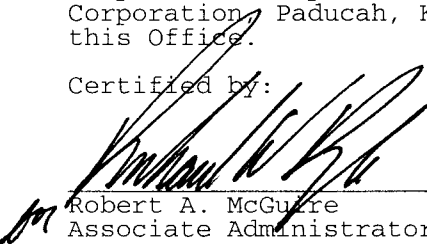

Robert A. McGuire
Associate Administrator for Hazardous Materials Safety

AUG 11 2006

(DATE)

Revision 1 - Issued to clarify the validity only to non-fissile or fissile excepted material and to extend the expiration date.

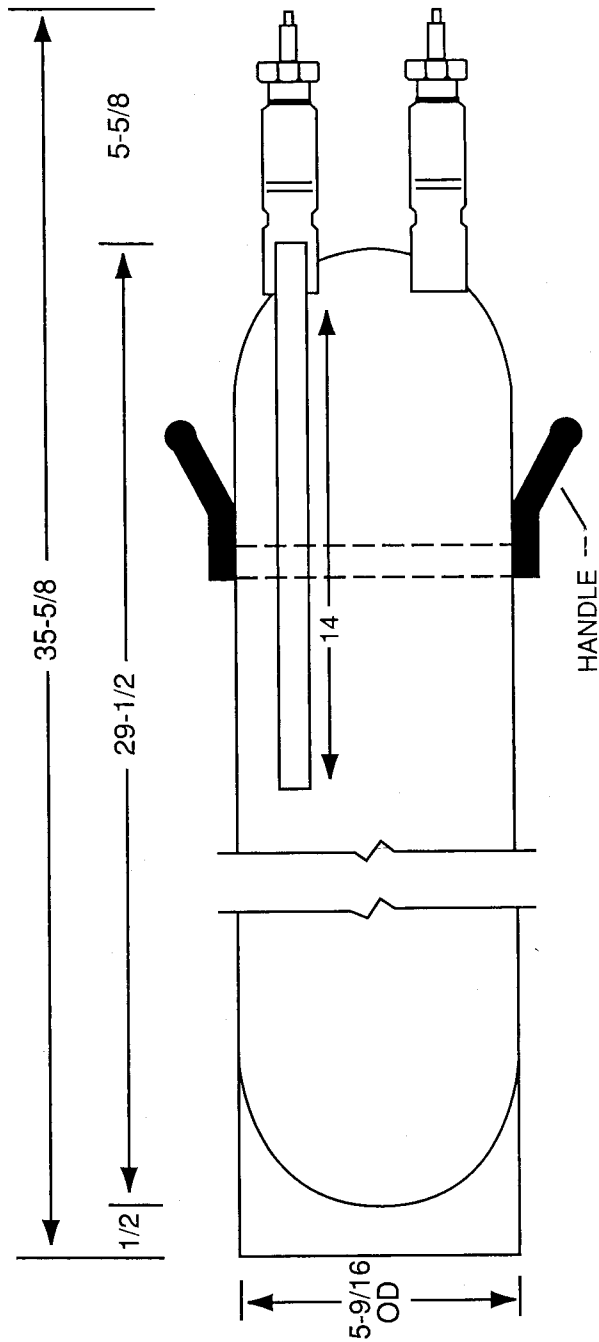


FIGURE 16

Schematic of Cylinder Models 5A and 5B

6.4 UF₆ Cylinder Models 5A and 5B

- Nominal Diameter 5 in. (127 mm)
- Nominal Length 36 in. (914 mm)
- Wall Thickness 1/4 in. (6.5 mm)
- Nominal Tare Weight 55 lb (24.95 kg)
- Maximum Net Weight 55 lb (24.95 kg)
- Nominal Gross Weight ... 110 lb (without cap) (49.9 kg)
- Minimum Volume 0.284 ft³ (8.04 liters)
- Basic Material of Construction 5A Monel
- Basic Material of Construction 5B Nickel
- Service Pressure 200 psig (1380 kPa gage)
- Hydrostatic Test Pressure 400 psig (2760 kPa gage)
- Isotopic Content Limit 100% ²³⁵U

Valve Used - 3/4-in. valve.

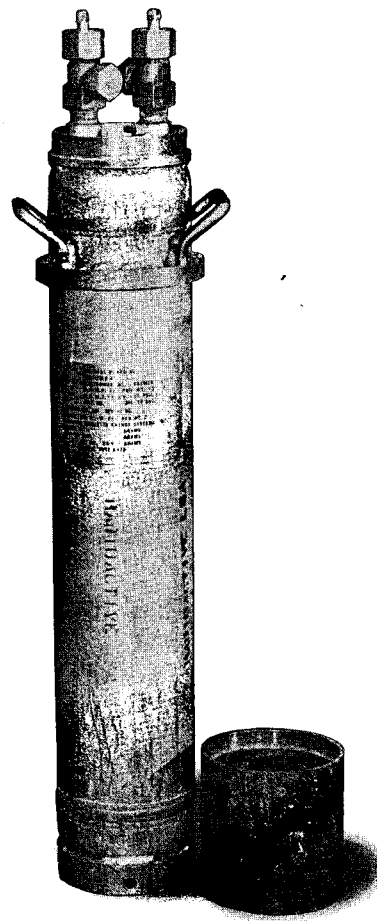


FIGURE 17

Cylinder Models 5A and 5B

6.5 UF₆ Cylinder Model 8A

Nominal Diameter 8 in. (20 cm)
 Nominal Length 56 in. (142 cm)
 Wall Thickness 3/16 in. (0.5 cm)
 Nominal Tare Weight 120 lb (54.43 kg)
 Maximum Net Weight 255 lb (115.67 kg)
 Nominal Gross Weight .. 375 lb (without cap) (170.1 kg)
 Minimum Volume 1.319 ft³ (37.4 liters)
 Basic Material of Construction Monel
 Service Pressure 200 psig (1380 kPa gage)
 Hydrostatic Test Pressure 400 psig (2760 kPa gage)
 Isotopic Content Limit 12.5% ²³⁵U (max.)

Valve Used - 3/4-in. valve.

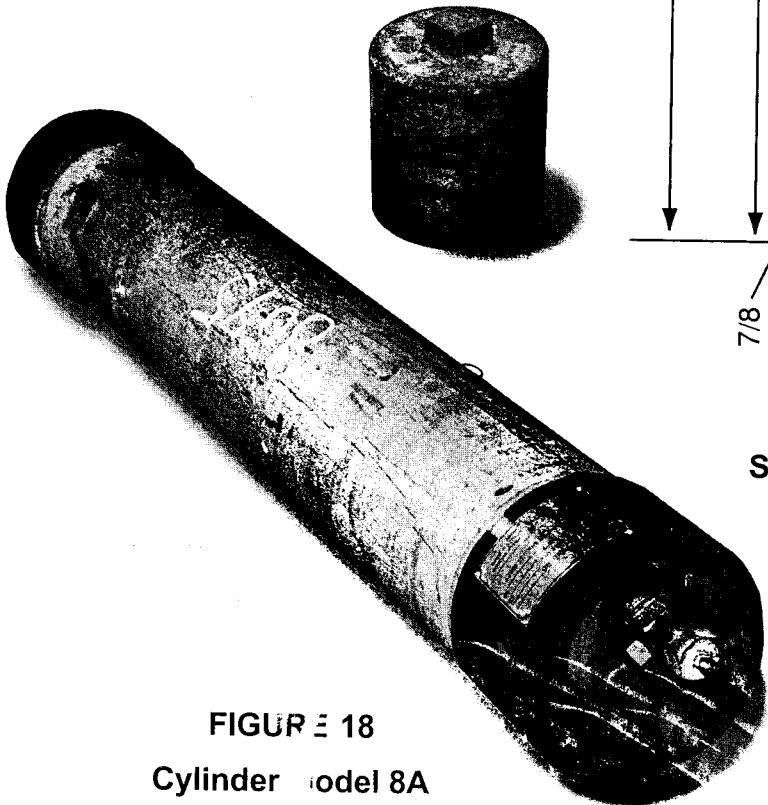


FIGURE 18
 Cylinder Model 8A

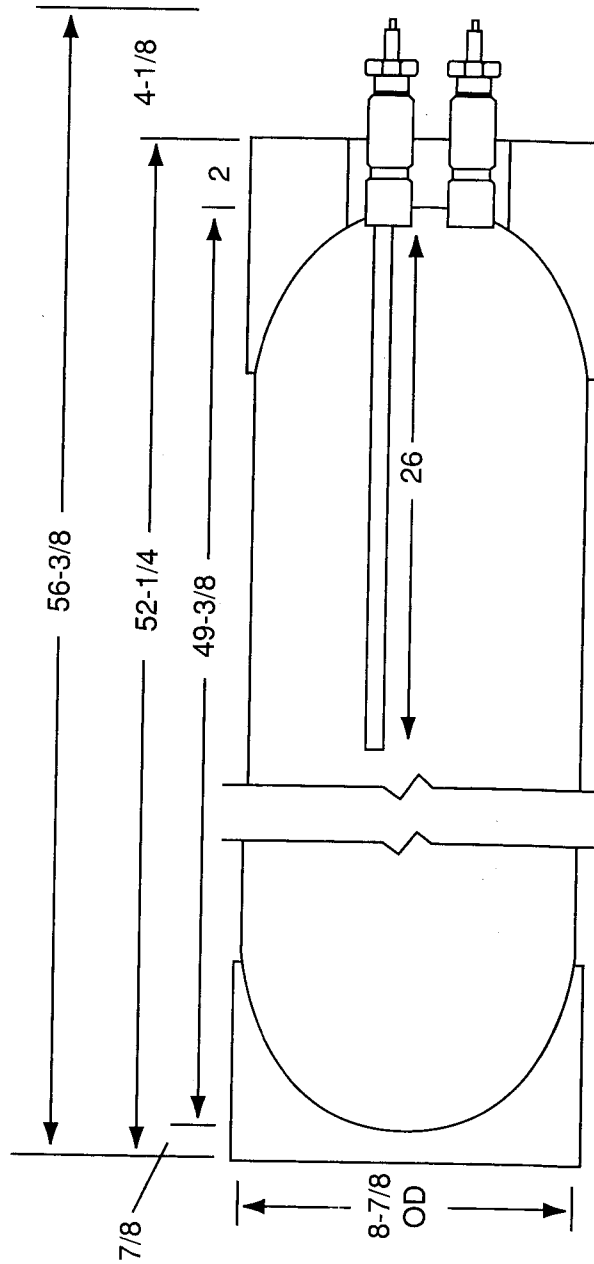


FIGURE 19
 Schematic of Cylinder
 Model 8A

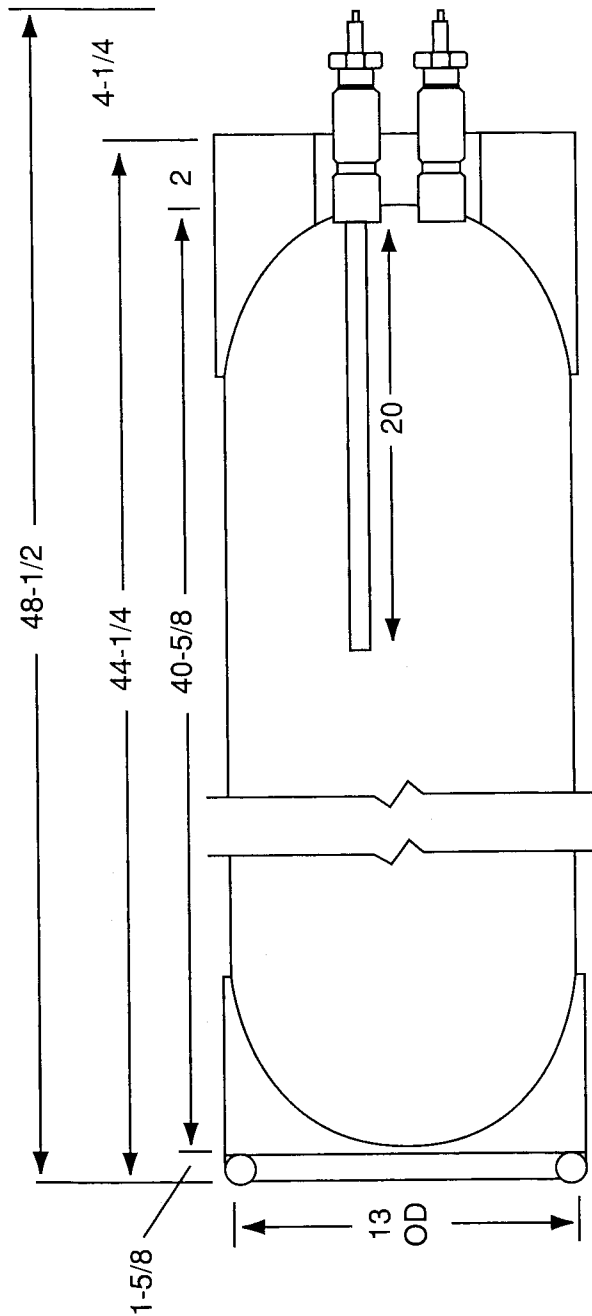


FIGURE 20

Schematic of Cylinder Model 12B

6.6 UF₆ Cylinder Model 12B

Nominal Diameter	12 in. (30.5 cm)
Nominal Length	49.5 in. (126 cm)
Wall Thickness	0.250 in. (0.65 cm)
Nominal Tare Weight	185 lb (84 kg)
Maximum Net Weight	460 lb (208.7 kg)
Nominal Gross Weight	645 lb (without cap) (293 kg)
Minimum Volume	2.38 ft ³ (67 liters)
Basic Material of Construction	Monel
Service Pressure	200 psig (1380 kPa gage)
Hydrostatic Test Pressure	400 psig (2760 kPa gage)
Isotopic Content Limit	5.0% ²³⁵ U (maximum)

Valve Used - 3/4-in. valve.

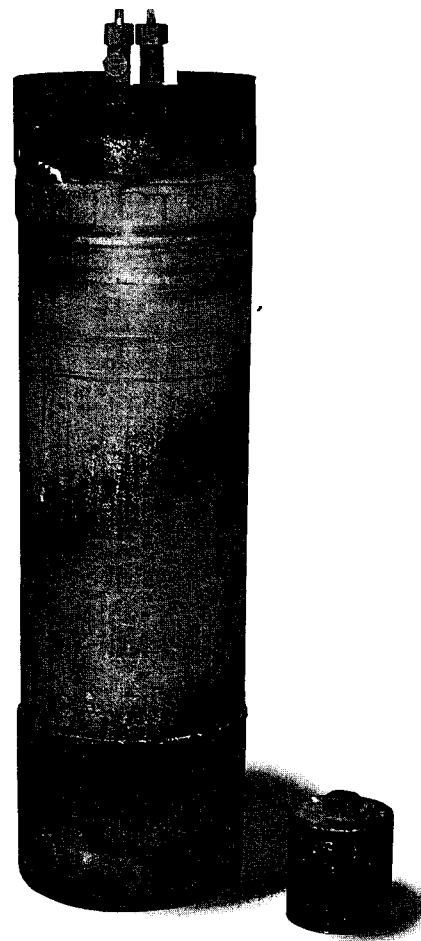


FIGURE 21

Cylinder Model 12B

6.7 UF₆ Cylinder Model 30B

Nominal Diameter	30 in. (76 cm)
Nominal Length	81 in. (206 cm)
Wall Thickness	1/2 in. (1.25 cm)
Nominal Tare Weight	1,400 lb (635 kg)
Maximum Net Weight	5,020 lb (2,277 kg)
Nominal Gross Weight	6,420 lb (2,912 kg)
Minimum Volume	26 ft ³ (736 liters)
Basic Material of Construction	Steel (ASTM A-516)
Service Pressure	200 psig (1380 kPa gage)
Hydrostatic Test Pressure	400 psig (2760 kPa gage)
Isotopic Content Limit	5.0% ²³⁵ U (max. with moderation control)

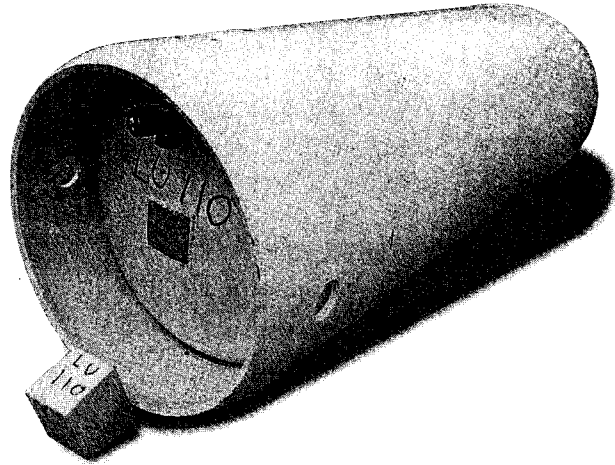


FIGURE 22
Cylinder Model 30B

Valve Used - 1-in. valve.

Note: Primarily used for low enriched UF₆ product.

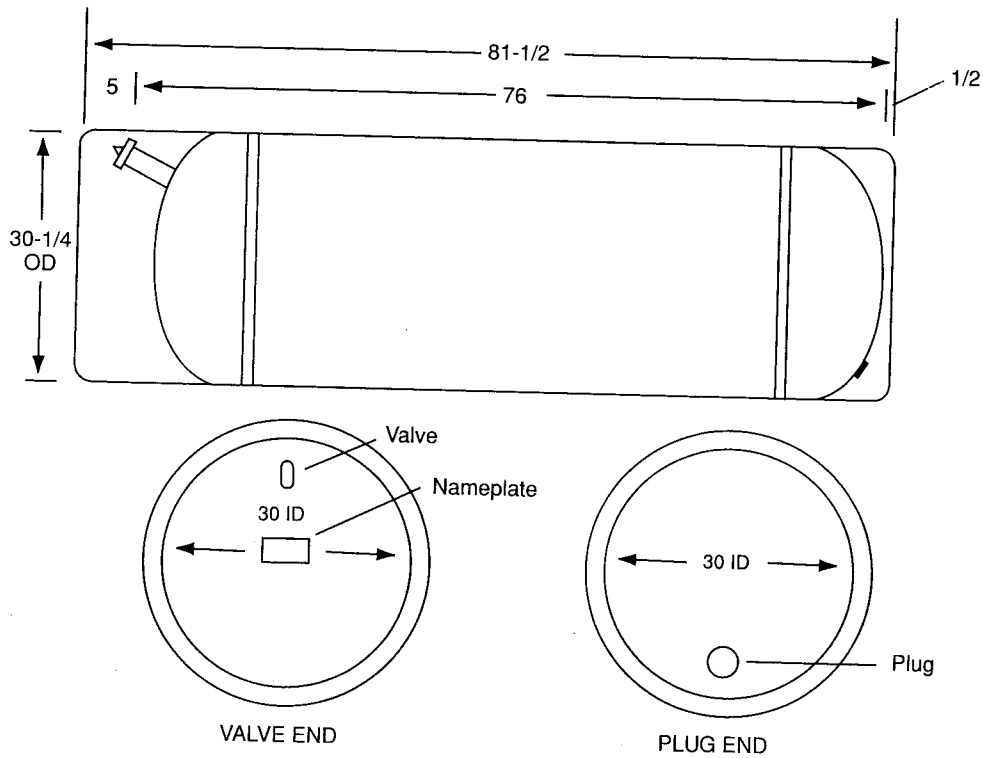


FIGURE 23
Schematic of Cylinder Model 30B

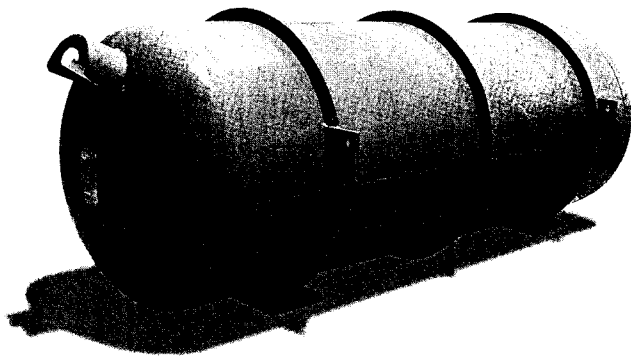


FIGURE 28
Cylinder Model 48G

6.10 UF₆ Cylinder Model 48G

Nominal Diameter	48 in. (122 cm)
Nominal Length	146 in. (370 cm)
Nominal Wall Thickness	5/16 in. (0.8 cm)
Nominal Tare Weight	2,600 lb (1,179 kg)
Maximum Net Weight	28,000 lb (12,701 kg)*
Nominal Gross Weight	30,600 lb (13,800 kg)
Minimum Volume	139 ft ³ (3.94 m ³)
Basic Material of Construction	Steel**
Service Pressure	100 psig (690 kPa gage)
Hydrostatic Test Pressure	200 psig (1380 kPa gage)
Isotopic Content Limit	1% ²³⁵ U

Valve Used - 1-in. valve.

Note: Primarily used for depleted UF₆ storage. Cylinders with serial numbers below 111821 do not have certified volumes. An earlier design was designated Model OM.

* Based on 235°F (113°C).

** Steel specification changed from A-285 to A-516 for cylinders ordered after 1978.

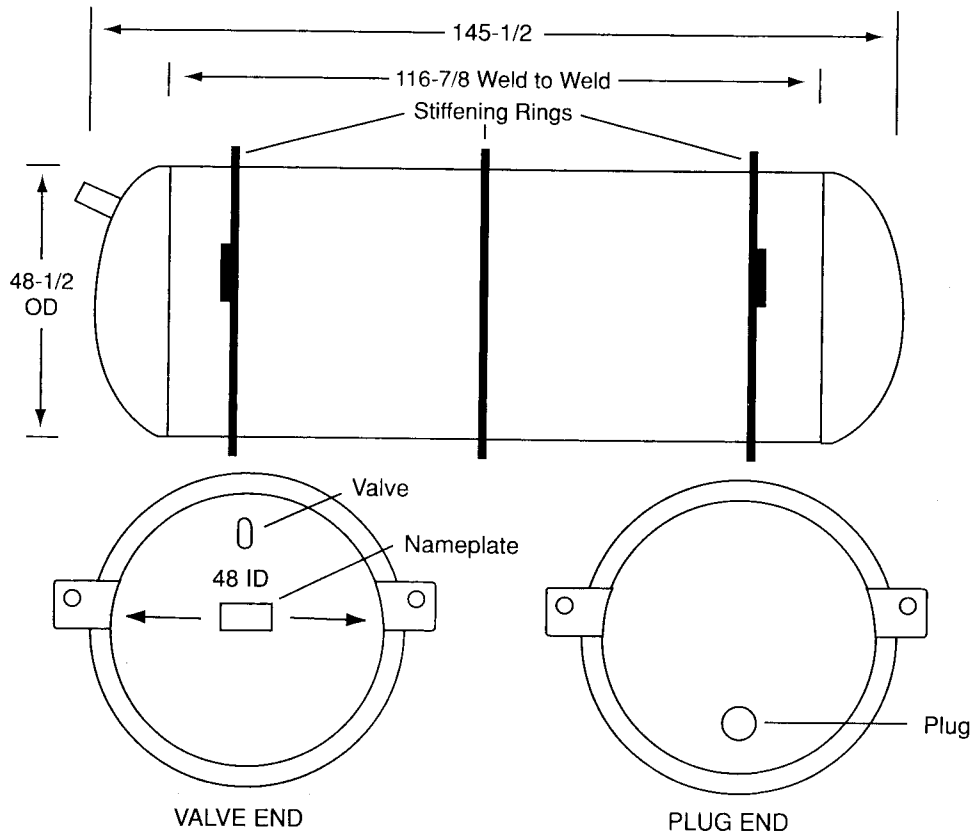


FIGURE 29
Schematic for Cylinder Model 48G

6.11 UF₆ Cylinder Model 48H

Nominal Diameter 48 in. (122 cm)
 Nominal Length 146 in. (370 cm)
 Nominal Wall Thickness 5/16 in. (0.8 cm)
 Nominal Tare Weight 3,170 lb (1,438 kg)
 Maximum Net Weight 27,030 lb (12,261 kg)
 Nominal Gross Weight 30,200 lb (13,700 kg)
 Minimum Volume 140 ft³ (3.96 m³)
 Basic Material of Construction A-516 Steel
 Service Pressure 100 psig (690 kPa gage)
 Hydrostatic Test Pressure 200 psig (1380 kPa gage)
 Isotopic Content Limit 1% ²³⁵U
 Valve Used - 1-in. valve.

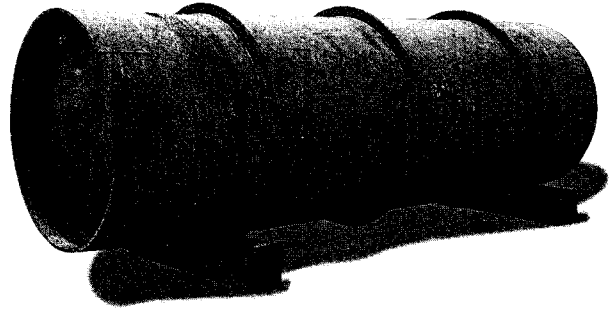


FIGURE 30
Cylinder Model 48H

Note: Primarily used for natural UF₆.

Note: 48HX cylinders are similar in design but are constructed of A-285 steel.

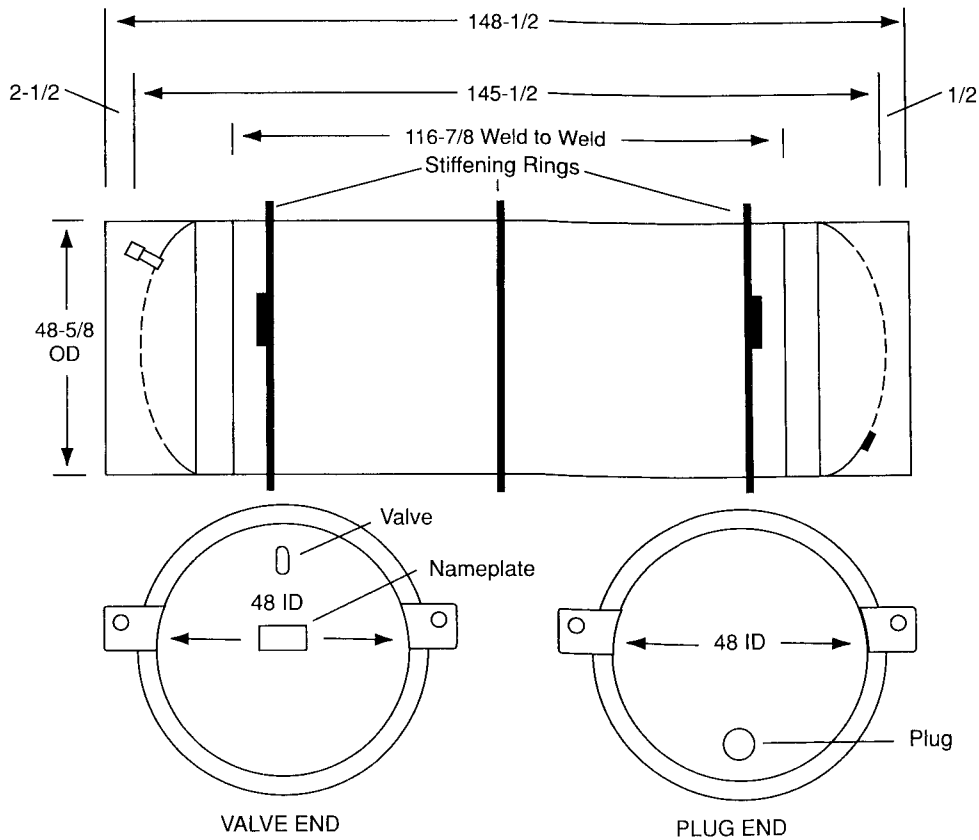


FIGURE 31
Schematic for Cylinder Model 48H